



GENERAL DATA

Application:	M/HBP
Refrigerant:	R134a
Expansion Device:	C
Weight:	12.6 kg
Receiver:	0 liter
Voltage/Frequency:	220 - 240 V 50 ~
Height:	12.6 mm
Length:	431 mm
Width:	290 mm
Institute Approvals:	CE


EXTERNAL DIMENSIONS

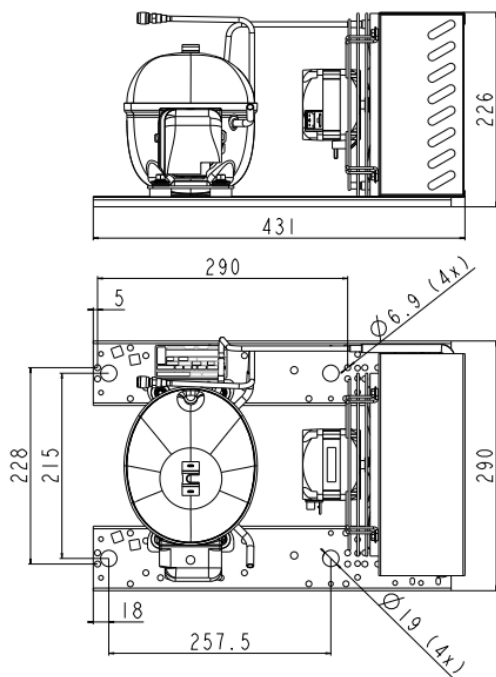

WIRING DIAGRAM

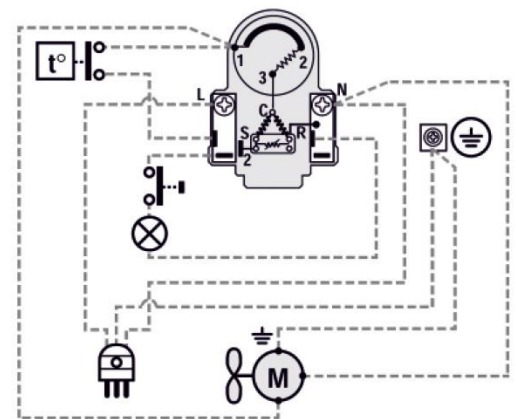

OPERATING ENVELOPE

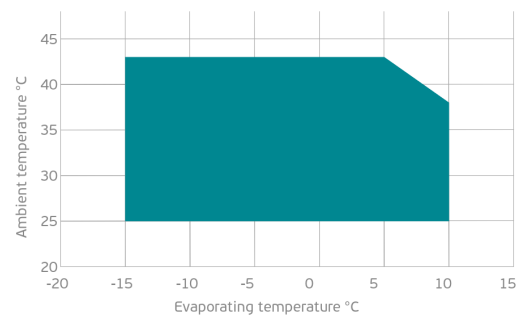

COMPONENTS (SPARE PARTS)

condenser: 2R8T 2451207

fankit: 10W 200/28/5B 1996700

For additional accessories please contact our technical support

ELECTRICAL DATA

Motor Type:	RSIR -
Locked Rotor Amperage (LRA):	5.4 A
Max.Current:	1.3 A

At maximum evaporating temperature and maximum ambient temperature.

FAN MOTOR

Number:	1 -
Shaft Power:	10 W
Air Flow:	300 m ³ /h
Blade Diameter:	200 mm

PERFORMANCE CURVE DATA

Standard: EN13215-RG20 / return gas 20°C, subcooling 3K

50 Hz

	Evaporating Temperature (°C)	Cooling Capacity (W)	Power Consumption (W)	Current Consumption (A)	Efficiency (W/W)
25 °C Ambient Temperature	10°C	550	212	1.30	2.59
	5°C	476	195	1.22	2.44
	0°C	405	179	1.15	2.27
	-5°C	338	164	1.10	2.06
	Rated point -10°C	275	150	1.06	1.83
	-15°C	218	139	1.01	1.57
32 °C Ambient Temperature	10°C	500	219	1.34	2.28
	5°C	432	201	1.25	2.15
	0°C	368	184	1.19	2.00
	-5°C	307	169	1.14	1.82
	Rated point -10°C	250	155	1.09	1.61
	-15°C	198	143	1.04	1.38
43 °C Ambient Temperature	5°C	369	213	1.34	1.73
	0°C	313	195	1.26	1.60
	-5°C	261	179	1.21	1.46
	Rated point -10°C	212	164	1.15	1.29
	-15°C	168	152	1.10	1.11