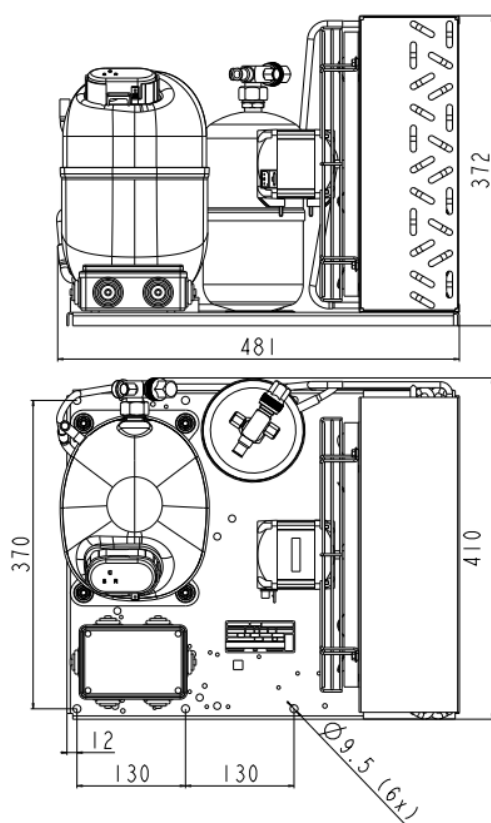
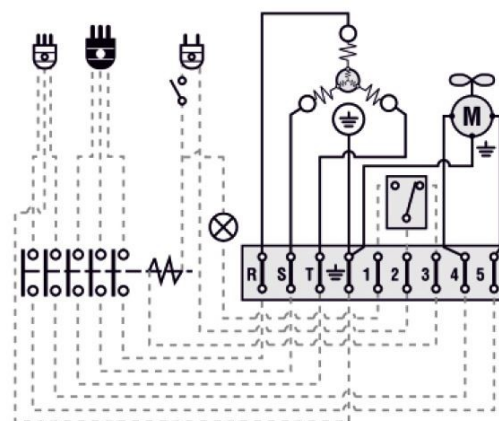
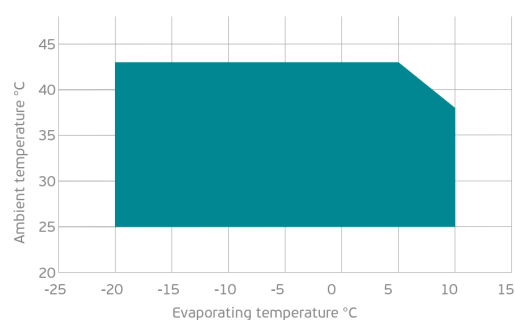
**GENERAL DATA**

Application:	M/HBP
Refrigerant:	R404A
Expansion Device:	C-V
Weight:	36.9 kg
Receiver:	2.3 liter
Voltage/Frequency:	<b>380 - 420 V 50 ~</b>
Height:	36.9 mm
Length:	481 mm
Width:	410 mm
Institute Approvals:	<b>CE</b>

**EXTERNAL DIMENSIONS****WIRING DIAGRAM****OPERATING ENVELOPE****COMPONENTS (SPARE PARTS)**

valve_disch:	SOLDER 3/8"	2110049
compressor:	NJ9226GS	948LM19..AC
fankit:	34W/400V 300/28°/5B	1996586

valve_disch:	SOLDER 3/8"	2110049
compressor:	NJ9226GS	948LM19..AC
fankit:	34W/400V 300/28°/5B	1996586

For additional accessories please contact our technical support

ELECTRICAL DATA

Motor Type:	3PH -
Locked Rotor Amperage (RLA):	10 A
Max.Current:	2.78 A
At maximum evaporating temperature and maximum ambient temperature.	

FAN MOTOR

Number:	1 -
Shaft Power:	34 W
Air Flow:	700 m <sup>3</sup> /hod
Blade Diameter:	300 mm

PERFORMANCE CURVE DATA

Standard: EN13215-RG20 / return gas 20°C, subcooling 3K

						50 Hz
		Evaporating Temperature (°C)	Cooling Capacity (W)	Power Consumption (W)	Current Consumption (A)	Efficiency (W/W)
25°C Ambient Temperature		10°C	2 588	1 664	2.95	1.56
		5°C	2 306	1 487	2.67	1.55
		0°C	2 024	1 328	2.43	1.52
		-5°C	1 747	1 186	2.22	1.47
	Rated point	-10°C	1 477	1 060	2.04	1.39
		-15°C	1 215	949	1.89	1.28
		-20°C	966	852	1.77	1.13
32°C Ambient Temperature		10°C	2 371	1 707	3.03	1.39
		5°C	2 092	1 535	2.76	1.36
		0°C	1 823	1 378	2.52	1.32
		-5°C	1 566	1 234	2.31	1.27
	Rated point	-10°C	1 324	1 102	2.12	1.20
		-15°C	1 100	981	1.95	1.12
		-20°C	896	869	1.81	1.03
43°C Ambient Temperature		5°C	1 822	1 583	2.83	1.15
		0°C	1 539	1 429	2.60	1.08
		-5°C	1 281	1 282	2.38	1.00
	Rated point	-10°C	1 051	1 142	2.17	0.92
		-15°C	851	1 005	1.99	0.85
		-20°C	685	873	1.81	0.78

